



Vortex Spas

Azure Spa Technical Information Pack




Dimensions: 199 x 199 x 82cm

A great entry level, twin lounge spa
with room for 5.



Azure Spa

Dimensions: 199 x 199 x 82cm

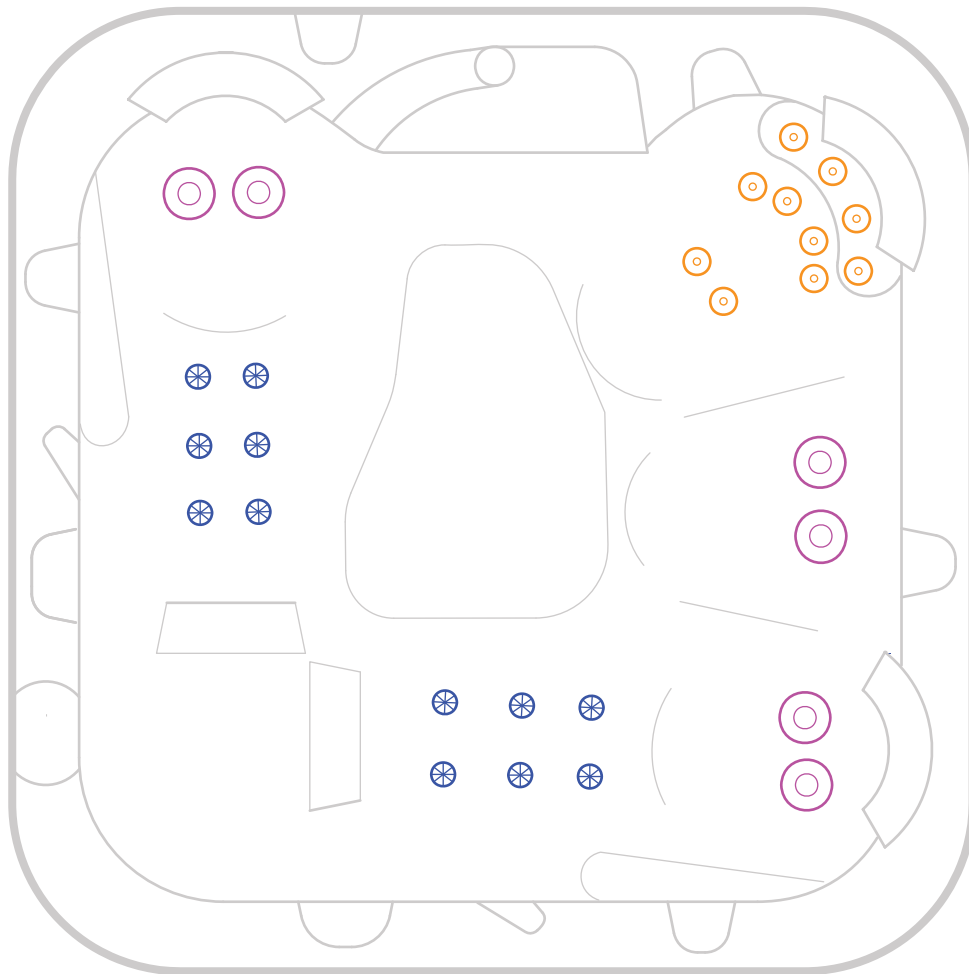


 6 x 127mm Directional Jets

 10 x 50mm Directional Jets

 12 x 40mm Air Jets




Azure Spa

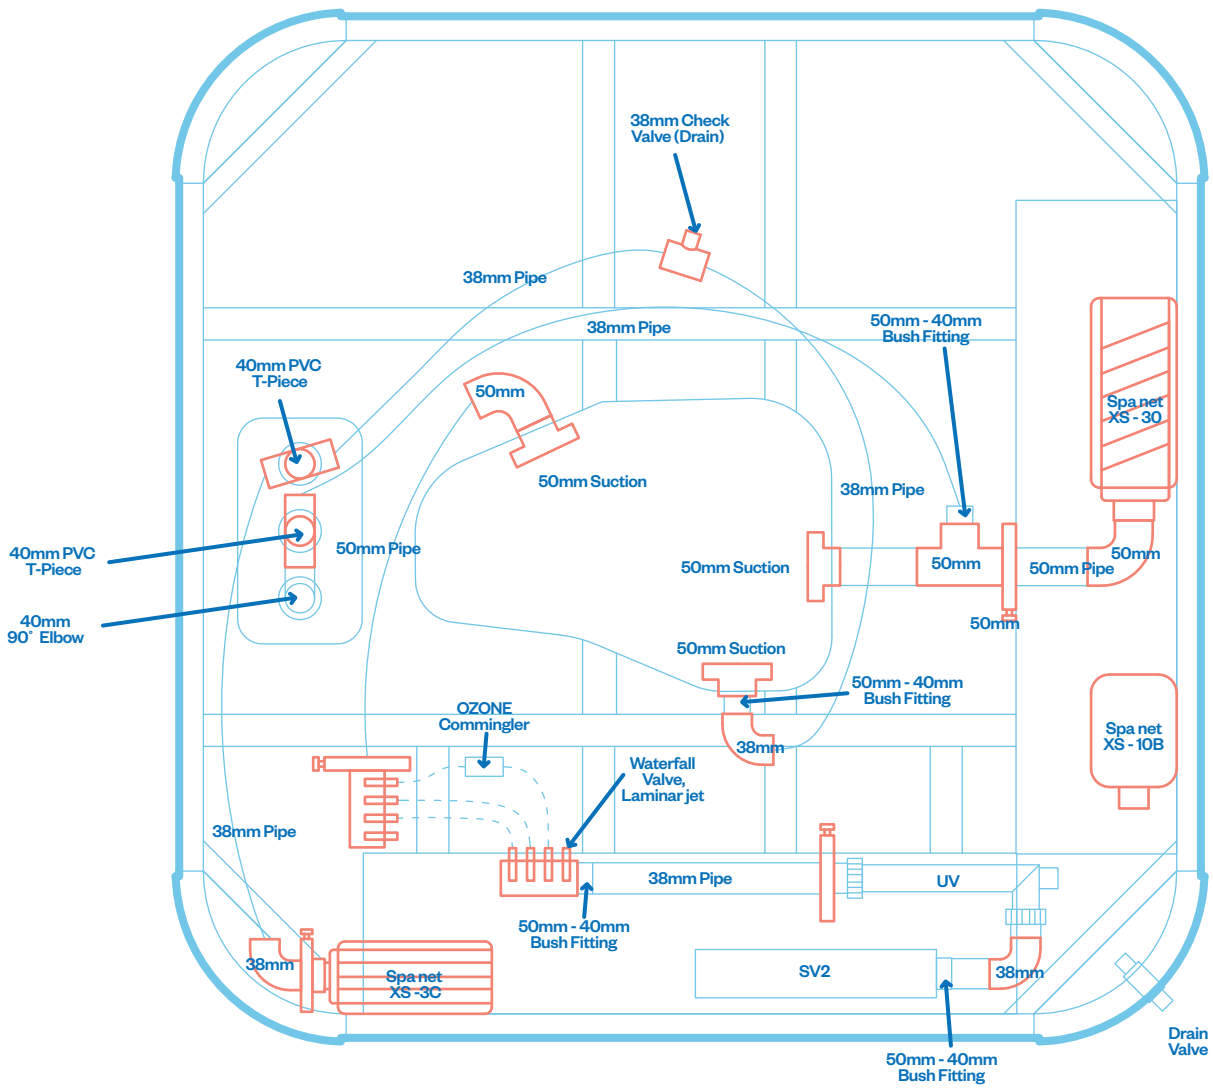






Azure Spa

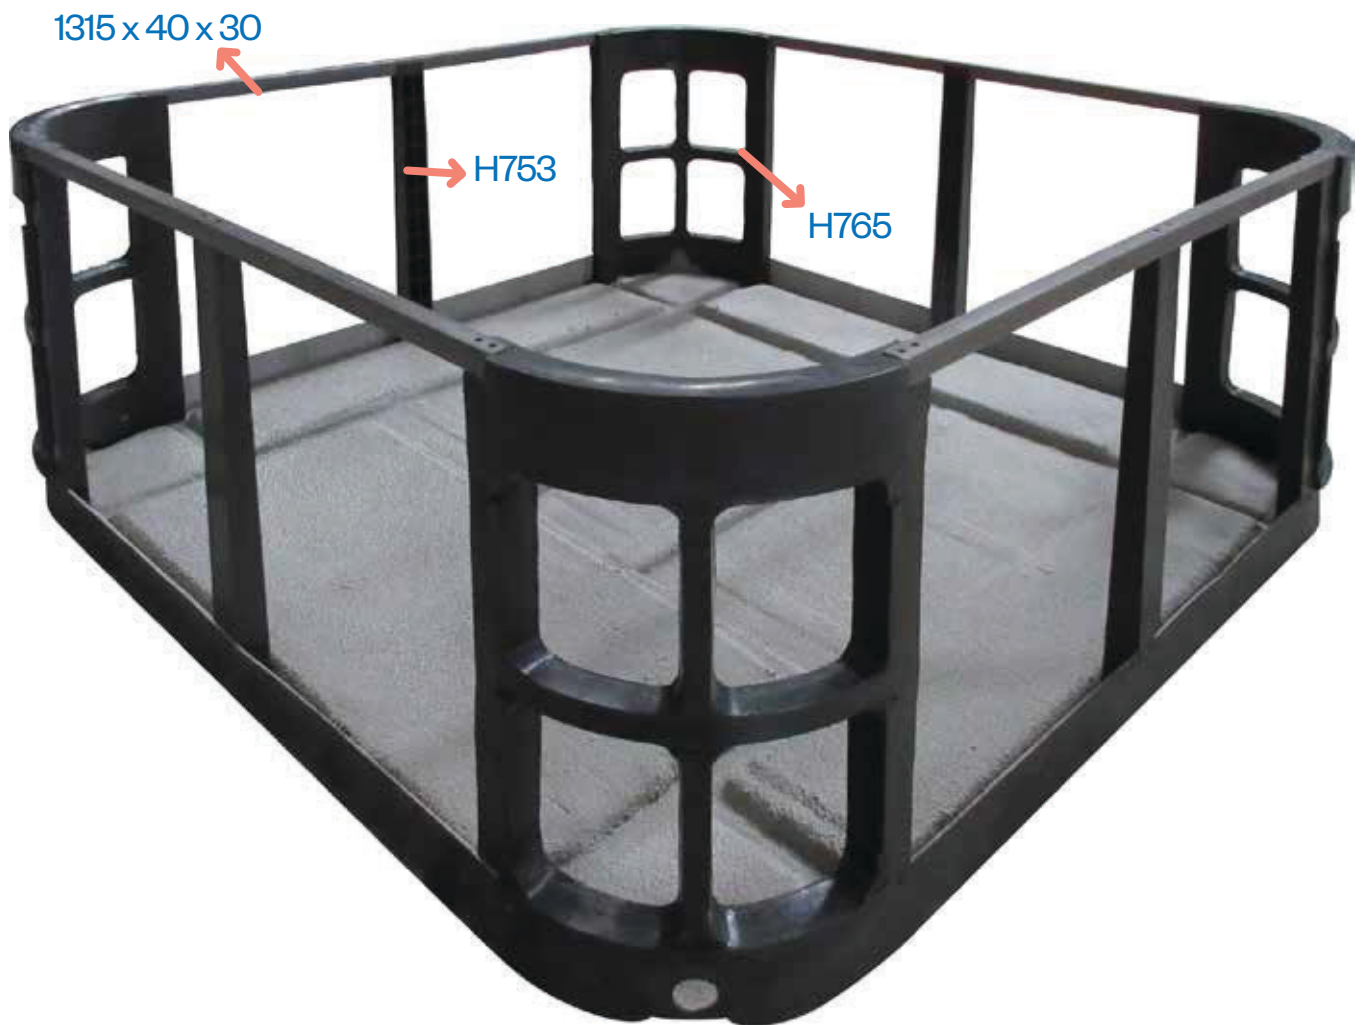



Azure Spa

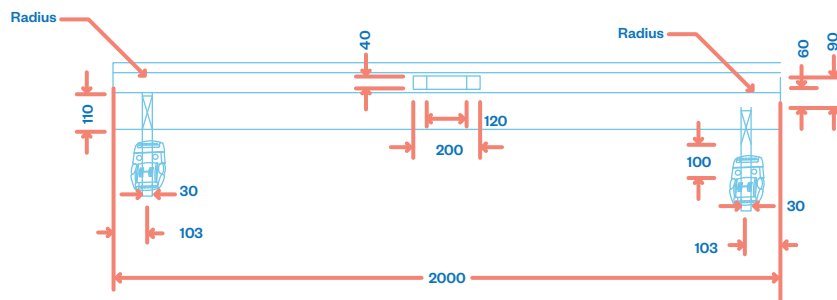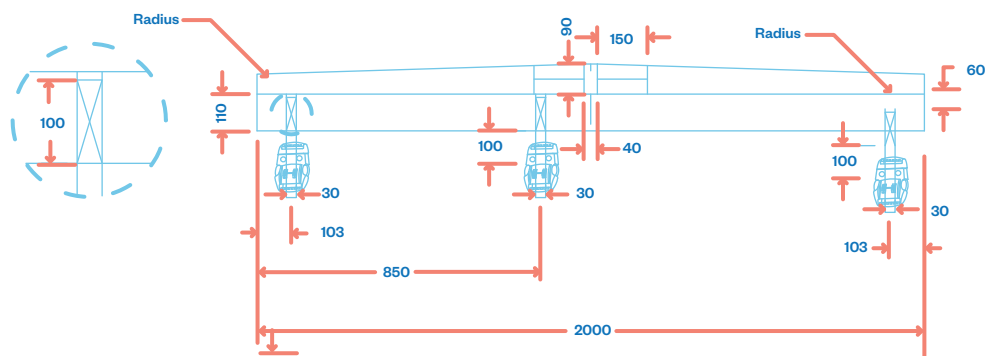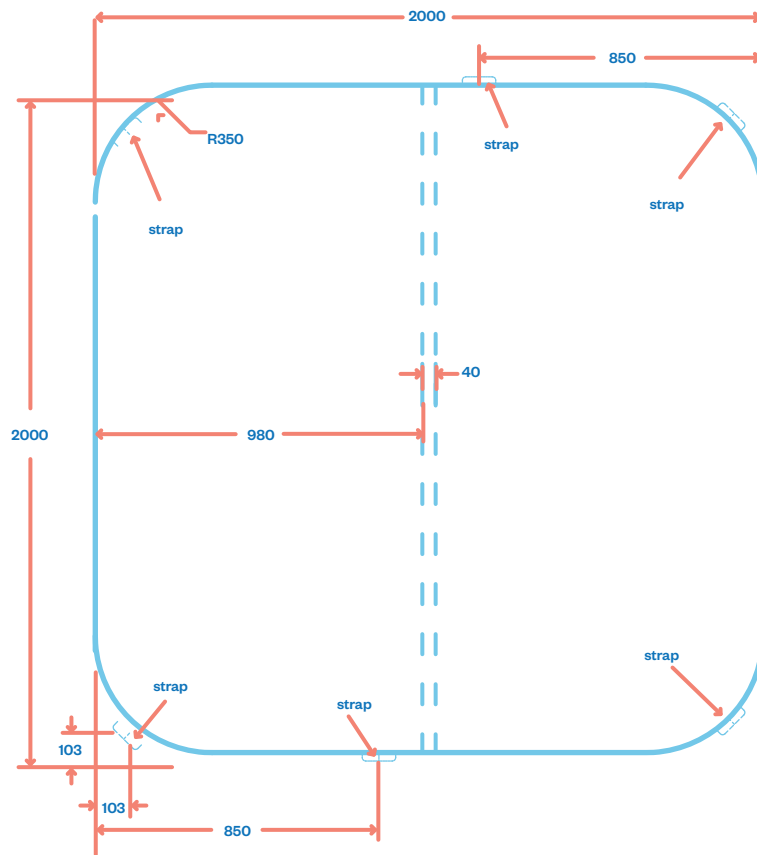

Azure.

Hydrotherapy



Jets 31

Volume 900 litres

Seating 4 seats

Dimensions 1.99 x 1.99 x .82m high

Seat layout



1. Neck and shoulder therapy

2. Cool down

3. Lounger

4. Lounger



Vortex Spas

* Conditions apply. Specifications may change without notice. May be pictured with some options included.

Features

Spa features

- LED backlit water cascade
- Spa health indicator
- Aromatherapy system
- Colour matching steps
- SmartSTREAM sound system*

Build

- Thermoclad maintenance free cabinet
- Superior USA made Aristech acrylic
- Thermobond 4 layer shell construction
- 12 shell/cabinet colour combinations
- Timber free 'no rot' Permaframe
- High impact moulded ABS base
- Duraflex 'no kink' PVC plumbing

Water care

- Purezone micro filtration
- Purezone CD Ozone water clarifier
- Purezone UV sterilising system

Lighting

- Programmable lighting
- Underwater LED floodlight
- Perimeter & cabinet lighting
- Hydroglow jet & topside control lighting

Hydrotherapy

- Stainless steel jet casings
- Neck therapy collar
- Dual hydrotherapy loungers
- Individual seat pressure controls
- Hydroflow stainless steel spinning jets

Control

- SpaNet premium control systems
- Smart phone app remote control*
- SmartLINK WIFI connectivity*

Efficiency

- Intelligent thermal tuning
- High density lockable hardcover
- Perimeter insulation
- Dual layer insulation
- Hybrid heat pump*
- Arctic pack insulation*

*optional

Specifications

Dry weight	300kg
Filled weight (inc cover)	1214kg
Lift weight	394kg
Intuitive spa controller	SV2
Programmable circulation pump	250W
Jet pumps	3HP x 1
Variable speed airblower	1000W
Variable output heater	3kW max
Electrical requirements	15 amps max

Warranties

Frame	Lifetime
Shell structure	10 years
Acrylic surface	5 years
Jets, plumbing & heater	5 years
Pumps & equipment	2 years